


Accu-Lube®

Frequency Generator Bladder Repair Kit, Part # 9046

Dirty or oily compressed air can damage the frequency generator. If your applicator no longer pumps or pumps extremely fast the problem can usually be fixed by replacing the bladders included in the repair kit into your frequency generator. To prevent the problem from re-occurring it is recommended that you add a coalescing filter to remove oil from the air supply and a particle filter to remove dirt.

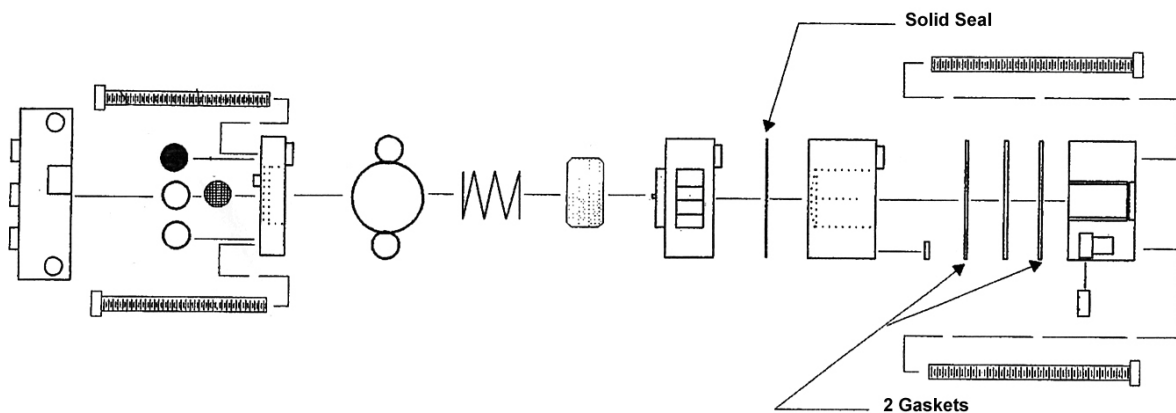


Connect the main air supply to the middle port (2) on the back of the base plate of the frequency generator. Connect the cycled air from port (3) of the base plate to the pump(s).

9460 Frequency Generator (no base plate)



9046 Bladder Kit for the Frequency Generator

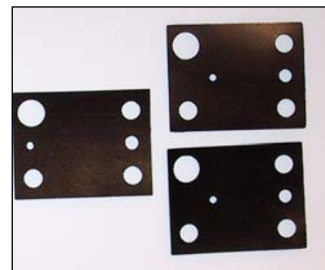

9707 Frequency Generator complete with base plate

ITW ROCOL North America

3624 West Lake Avenue, Glenview, Illinois 60026

Tel (800) 452-5823, Tel (847) 657-5359

Fax (800) 952-5823, Fax (847) 657-4897

www.rocolnorthamerica.com